High thicknesses type

These torches have been especially designed for heavy duty heating and shaping work on all thicknesses.

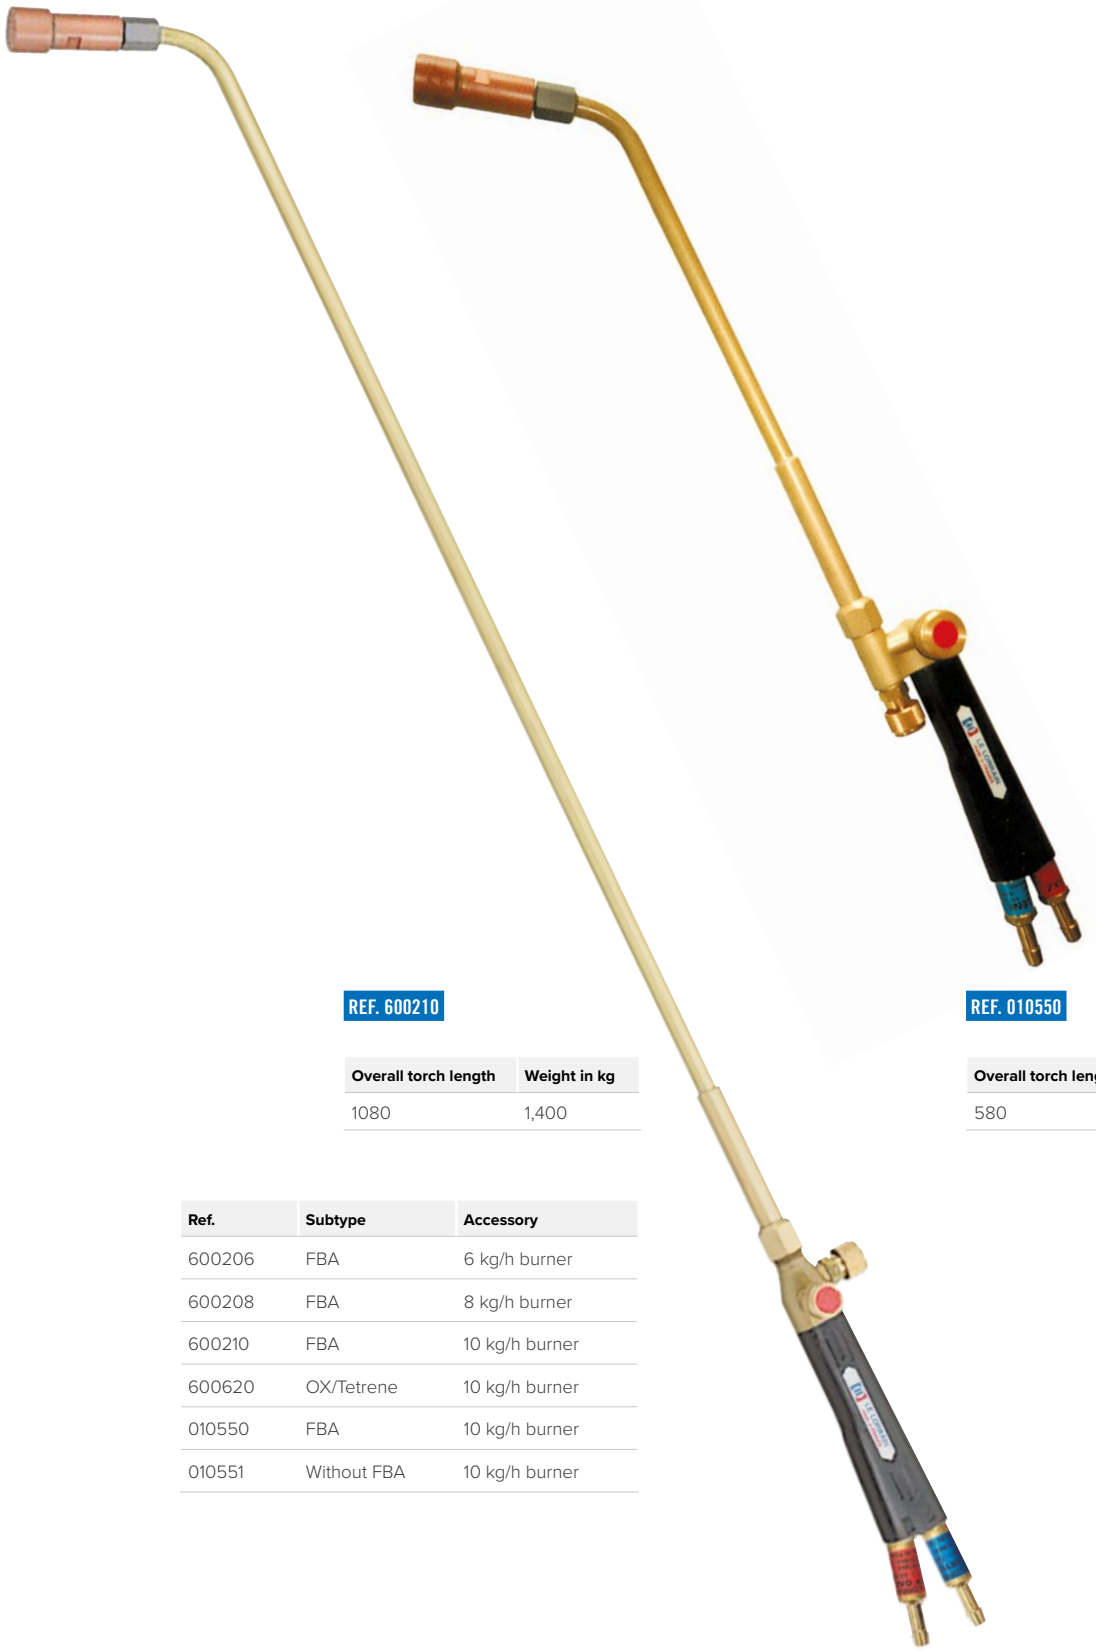

REF. 600210

Overall torch length	Weight in kg
1080	1,400

REF. 010550

Overall torch length	Weight in kg
580	1,300

Ref.	Subtype	Accessory
600206	FBA	6 kg/h burner
600208	FBA	8 kg/h burner
600210	FBA	10 kg/h burner
600620	OX/Tetrene	10 kg/h burner
010550	FBA	10 kg/h burner
010551	Without FBA	10 kg/h burner

High thicknesses type

TIPS AND BURNERS

Multi-flame







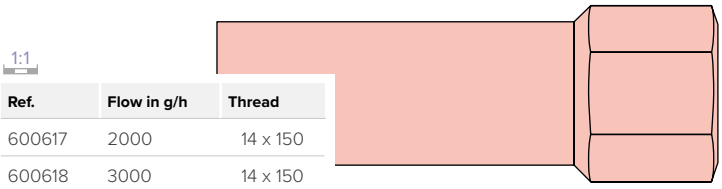

Ref.	Flow in g/h	Thread
600617	2000	14 x 150
600618	3000	14 x 150
600614	4000	14 x 150

Multi-flame (also used for propylene)

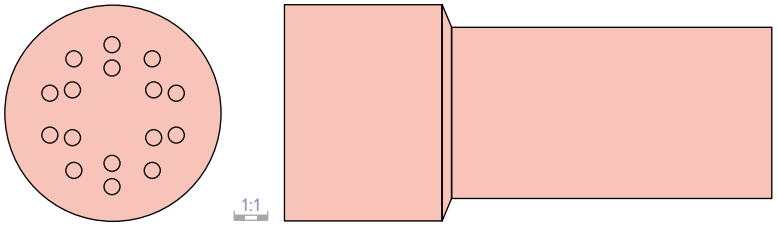

Ref.	Flow in g/h	Thread
600615	6000	14 x 150
600616	8000	14 x 150
600608	10000	14 x 150

Multi-flame OX/Ethylene

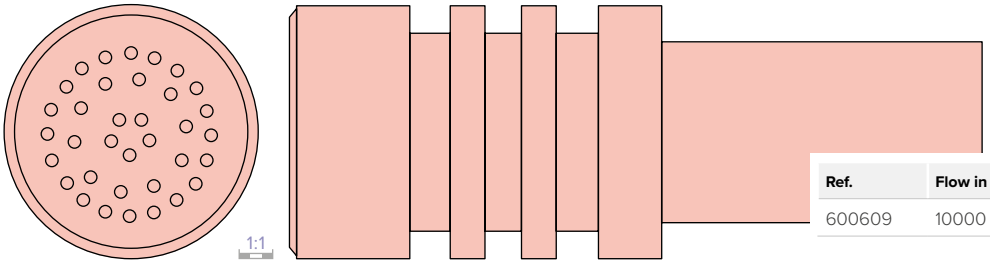

Ref.	Flow in g/h	Thread
600609	10000	14 x 150

Round-flame

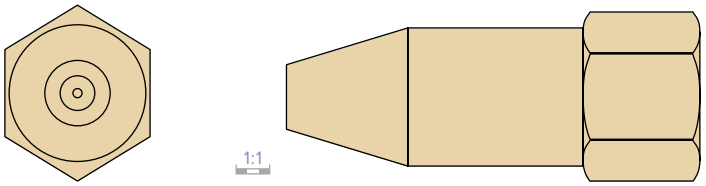

Ref.	Flow in g/h	Thread
015524	1500	14 x 150
015525	2000	14 x 150
015526	3000	14 x 150
015527	4000	14 x 150

PERFORMANCE TABLE

Max heating thickness in mm	OX pressure in bar	Gas pressure in bar	Maximum OX flow in l/h	Maximum LPG flow in g/h	Unit of power in kW (kilowatts)
45	4	0,7	18375	2625	128,00