Long lengths

FOR HEAVY DUTY

The heating rake is composed of 10 multi-flame tips (flow rate of each tips 1000 L/h), inclination of the lance on demand.
There is a variant : 5 multi-flame tips. Also works with natural gas, contact us.

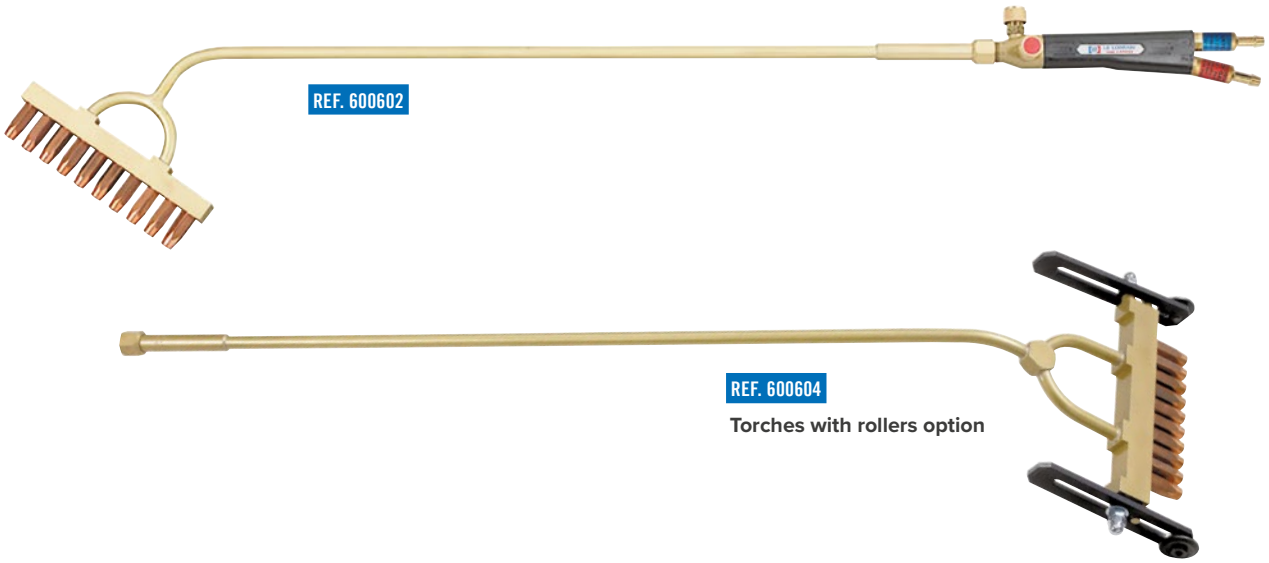

Ref.	Description	Width in mm	Overall torch length	Weight in kg
600601	Rake torche with 5 multi-flame tips 1	110	1080	1,400
600601	Rake torche with 10 multi-flame tips	200	1080	1,400
600601	Rake torche with 10 multi-flame tips and rollers	230	1080	1,600

TIPS AND BURNERS

Multi-flame burner



Ref.	Marking	Flow in g/h	Thread
600605	Oxygen / LPG	1000	12 x 125

PERFORMANCE TABLE

Max heating thickness in mm	Type	OX pressure in bar	Gas pressure in bar	Maximum OX flow in l/h	Maximum gas flow in g/h	Unit of power in kW (kilowatts)
25	5 tips rake	4	0,7	9187	1300	64,00
50	10 tips rake	4	0,7	18375	2625	128,00